



# **WI-AP210**

## **2.4G 300Mbps Indoor Ceiling Mount AP**

### **Data-sheet**

## Highlights

- 300Mbps wireless data rate for uninterrupted wireless connection
- 48V PoE(802.3af) Support for convenient and affordable installation
- Support AP, Gateway, WISP, Repeater mode
- Support QVLAN binding multi-SSID
- Captive portal provides one convenient method of authentication for Wi-Fi guests
- Rate limit on per SSID to restrict the bandwidth of each client
- 27dBm High-Power design
- Multi-SSID divides multiple wireless network for different users
- Load balance ensures large numbers of users have smooth network experiences in high density business networks
- Simple mounting design makes easy to install on any wall or ceiling surface
- Support 50users+ wireless access
- Compatible with 802.11 a/b/g/n products
- Support hardware controller managed

## Product



## Description


Wi-Tek's WI-AP210 Comply with the latest generation of 2.4G 802.11N Wi-Fi

Technology, data rate can be up to 300Mbps, improving overall network performance in

high client density environment; With multiple operation mode like Wireless AP, Gateway,

Repeater, WISP, Work with Hardware Controller for centralized configuration and management, access into Local or cloud server for advertisement and captive portal authentication for more business value. WI-AP210 is best applied to rural wireless Internet, wireless Hot spot and other industrial wireless solutions.

## Typical Applications

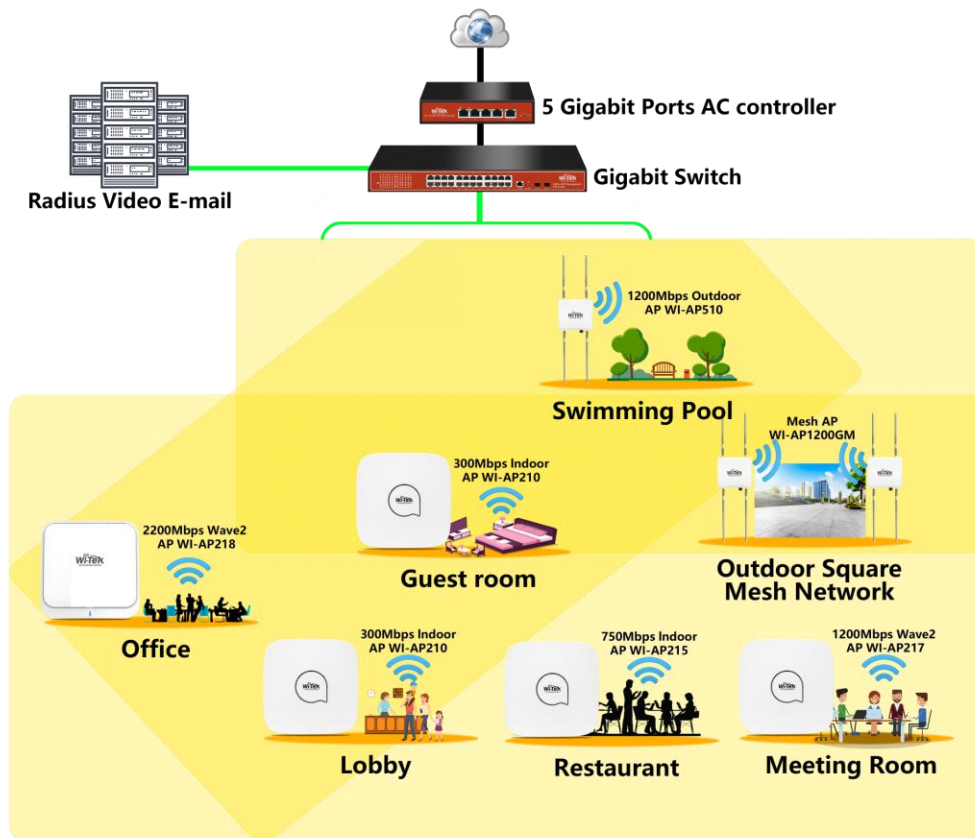

## Specifications

## HARDWARE FEATURES

<b>Processor</b>	Qualcomm QCA9531
<b>Memory</b>	128MB DDR2 16MB Flash
<b>Interface</b>	2*10/100M Ethernet Interface
<b>Power Supply</b>	48V 802.3af PoE
<b>Power Consumption</b>	6W
<b>Dimensions (H x W x D)</b>	160x160x35mm
<b>Antenna Type</b>	Internal Omni 2.4GHz: 2* 5dBi
<b>Protection</b>	6KV Lightning Protection
<b>Enclosure</b>	Ceiling /Wall Mounting (Kits included)

## WIRELESS FEATURES

<b>Wireless Standards</b>	IEEE 802.11ac/n/g/b/a
<b>Frequency</b>	2.4GHz
<b>Wireless Mode</b>	AP, Gateway, Reapter, WISP
<b>Signal Rate</b>	2.4GHz:Up to 300Mbps

## WIRELESS FEATURES

<b>Wireless Functions</b>	Multiple SSIDs Enable/Disable Wireless Radio Automatic Channel Assignment Transmit Power Control (Adjust Transmit Power on dBm) QoS(WMM) Band Steering Load Balance Schedule Wireless Statistics based on SSID/AP/Client
<b>Transmission Power</b>	27dBm(500mW)

## SOFTWARE FEATURES

<b>Wireless Security</b>	Captive Portal Authentication Access Control Wireless 802.1x Radius Mac Address Filtering Wireless Isolation Between Clients SSID to VLAN Mapping 64/128/152-bit WEP / WPA / WPA2-Enterprise, WPA- PSK / WPA2-PSK
<b>Management</b>	WEP management
<b>Hardware Controller</b>	Yes

<b>OTHERS</b>	
<b>Certification</b>	CE
<b>Package Contents</b>	1*AP 1* Pole Mounting Kit included
<b>System Requirements</b>	Microsoft Windows 98SE, NT, 2000, XP, Vista™ or Windows 10, Windows 8, Windows 7, MAC OS, NetWare, UNIX or Linux. Note: We recommend you to use one of following Web browsers for an improved user experience: Google Chrome, Safari, and Firefox. IE browsers are not recommended.
<b>Environment</b>	Working Temp: -40 ~ 70°C Storage Temp: -40 ~85°C Working Humidity: 10%~95% non-condensing