


Quick Installation Guide


10G SFP+ Fiber Media Converter

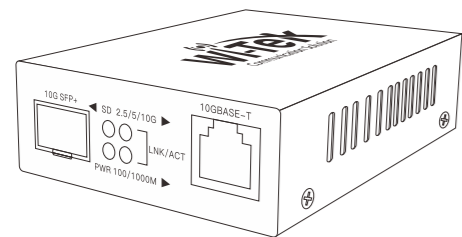


WI-MC301

www.wireless-tek.com

1. Package Contents

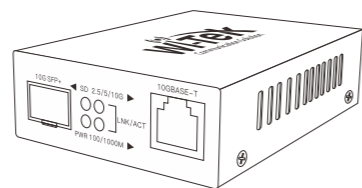

Fiber Media Converter x 1



Power Adapter x 1




Quick Installation Guide x 1


2. Appearance Overview

For WI-MC301

• Front Panel

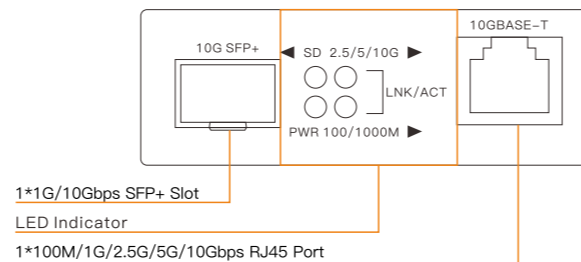

• Back Panel

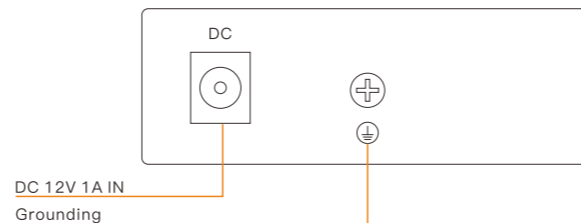


• LED Indicator

LED Indicators	Description
PWR	Solid on: The device power on is normal Off: The device is power off or failed
SD (Optical Link)	Solid on: Optical module access detected Off: Port is not connected to a network device
2.5/5/10G (Network Link&Act)	Solid on: RJ45 Port link Connected at 2.5G/5G/10Gbps Blinking: Data transmitting Off: Port is not connected or the connection is abnormal or negotiation fails
100/1000M (Network Link&Act)	Solid on: RJ45 Port link Connected at 100M/1000Mbps Blinking: Data transmitting Off: Port is not connected or the connection is abnormal or negotiation fails

3. Product Application


Scenario 1: Connect Devices with and without Optical Interfaces



SFP Slot Rate(bps)	RJ45 Port Rate(bps)	Communication Result
10G	2.5G/5G/10G	Yes
1G	1G	Yes
10G	1G/100M	No
1G	100M/2.5G/5G/10G	No

Note: Using the Wi-Tek optical module is recommended, because optical modules from other manufacturers may be incompatible.

Scenario 2: Connect Devices without Optical Interfaces

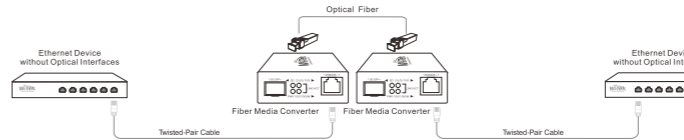

DUT 1_RJ45 Port Rate(bps)	DUT 1_SFP Slot Rate(bps)	DUT 2_SFP Slot Rate(bps)	DUT 2_RJ45 Port Rate(bps)	Communication Result
2.5G/5G/10G	10G	10G	2.5G/5G/10G	Yes
1G	10G	10G	1G	Yes
100M	10G	10G	100M	Yes
2.5G/5G/10G	10G	10G	1G/100M	No
1G	10G	10G	100M	No
1G	1G	1G	1G	Yes
100M	1G	1G	100M	Yes
100M/1G/2.5G/5G/10G	1G	1G	2.5G/5G/10G	No
1G	1G	1G	100M	No

Note: Using the Wi-Tek optical module is recommended, because optical modules from other manufacturers may be incompatible.

Warranty Card

Username	
Address	
Telephone No.	
Purchase Shop	
Purchase Address	
Product Model No.	
Purchase Time	
Serial No.	
Dealer Signature	

- If the product defects within the warranty period, we will provide professional maintenance service.
- Proof of purchase and a complete product serial number are required to receive any services guaranteed as part of the limited warranty.
- Any other defects that are not caused by workmanship or product quality, such as natural disasters, water damage, extreme thermal or environmental conditions, sticker damaged, warranty card loss will disqualify the product from limited warranty.



Technical Support



Company Website



Cloud Management

Wireless-Tek Technology Limited
Address: Building 3, Units 1801-1807, 1812,
Huaqiang Era Plaza, Tangwei Community,
Fuhai Street, Bao'an District, Shenzhen City,
Guangdong Province, China.

Website: www.wireless-tek.com

Tel: 86-0755-32811290

Email: sales@wireless-tek.com

Technical Support: tech@wireless-tek.com

