

Smart IoT Box

WI-IOTBOX01 | WI-IOTBOX02 | WI-IOTBOX03 Hardware:V3
New Upgrade: The new cooling duct design for more efficient cooling!



Overview

Wi-Tek's Smart IoT Box is an all-weather outdoor electrical equipment protection box designed for outdoor use in the outdoor environment. It has waterproof, dustproof, heat dissipation, anti-ultraviolet, anti-theft, anti-rust, acid and alkali corrosion, anti-electromagnetic interference (anti-lightning EMP), modular structure design in the box, electrical equipment can be installed vertically or horizontally according to the situation.

Fit outdoor CCTV, WLAN, Wi-Fi Coverage, Industrial IoT Application requirements with Wi-Tek industrial switch, 4G LTE router, outdoor wireless transmitter, solar powered PoE switch, IoT M2M gateway, and mesh AP, greatly decrease your project deployment cost by flexible modular installation.

Features

IP65 Ingress Protection

Outstanding dustproof and waterproof design protects the equipment inside the box in the outdoor.

Rugged construction

A seamless welding box body can withstand huge external forces without deformation.

Advanced Outdoor Protection

Made of aluminum alloy or stainless-steel connecting mounting parts, Electrostatic powder spraying main body, can anti-aging, gas corrosion resistance, UV damage resistance, acid and alkali corrosion resistance, salt spray moisture resistance.

Modular Installation

The modular structure design, top cover, side panel, DIN-rail, mounting plate, waterproof connector, fan, and microswitch are all detachable.

Heat Dissipation

The fan on the top and ventilation holes on the bottom form a bottom-up air duct to help heat dissipation.

Microswitch for Flexible Application

The door microswitch can be connected to the power supply, to the cloud alarm via I/O, or to the buzzer alarm.

Specifications



Products	WI-IOTBOX01
Hardware Version	V3
Hardware Features	
Overall Dimensions (W*H*D)	300*400*220mm (Include mounting slot) 300*400*206.2mm
Inner Dimensions (W*H*D)	180*340*160mm (Recommended)
Weight(kg)	8.7
Package Dimensions (W*H*D)	460*360*275mm
Package Weight(kg)	10
Thickness	1.2mm
Color	Light Grey + Grey
Material	SPCC
Surface Treatment	Electrostatic Spraying
Installation	Pole/Wall/Floor mounted
Door	1
Lock Hole	1
Detachable Side Plate	4 (2 on each side panel)
M25 Waterproof Connector	4 (2 on each side inner panel)
Aluminum Alloy Chute	2 (on the rear panel)
Bottom Cable Entry	1 (at the bottom)
Water Outlet Holes	4 (at the bottom, can be blocked with rubber plugs)
Microswitch	1 (on the upper right inside)
Fan	1 (on the top inner panel)
Insect Net	3 (2 on bottom inner side, by adhering it to the BOX with the magnetic bar in the attachment to achieve the best performance, 1 is between the fan and the top cover interlayer)
Equipment Installation	2*180mm DIN-Rail *Optional: 1* 188*42*120mm Mounting Plate
Protection	IP65
Application	
Application	Junction, Distribution, Electrical, Battery, Control, Monitoring etc. Outdoor waterproof Enclosure Box



Products	WI-IOTBOX02		WI-IOTBOX03	
Hardware Version	V3		V3	
Hardware Features				
Overall Dimensions (W*H*D)	400*600*265mm (Include mounting slot) 400*600*251.2mm		500*720*300mm (Include mounting slot) 500*720*286.2mm	
Inner Dimensions (W*H*D)	280*540*200mm (Recommended)		380*660*240mm (Recommended)	
Weight(kg)	14.1		19.8	
Package Dimensions (W*H*D)	680*480*315mm		800*580*355mm	
Package Weight(kg)	16.5		23	
Thickness	1.2mm			
Material	SPCC			
Color	Light Grey + Grey			
Surface Treatment	Electrostatic Spraying			
Installation	Pole/Wall/Floor mounted			
Door	1			
Lock Hole	1		2	
Detachable Side Plate	4 (2 on each side panel)			
M25 Waterproof Connector	4 (2 on each side inner panel)			
Aluminum Alloy Chute	2 (on the rear panel)			
Bottom Cable Entry	1 (at the bottom)			
Water Outlet Holes	4 (at the bottom, can be blocked with rubber plugs)			
Microswitch	1 (on the upper right inside)			
Fan	1 (on the top inner panel)			
Insect Net	3 (2 on bottom inner side, by adhering it to the BOX with the magnetic bar in the attachment to achieve the best performance, 1 is between the fan and the top cover interlayer)			
Equipment Installation	2* 275mm DIN-Rail 1* 285.2*42*99mm Mounting Plate 2* 285.2*42*124mm Mounting Plate		2* 345mm DIN-Rail 1* 373.2*142mm Vertical DIN Rail Mounting Plate 2* 373.2*214mm Horizontal Mounting Plate	
Protection	IP65			
Application				
Application	Junction, Distribution, Electrical, Battery, Control, Monitoring etc. Outdoor waterproof Enclosure Box			

Accessory Specifications

Products	
Fan	
Brand	Delta
Model	AFB0912HH
Input Voltage	12V DC (7.0 – 13.8 VDC)
Bearing	Ball
Termination	2 wire leads
Input Current	0.25 (≤0.4) A
Power consumption	3.0 (≤4.8) W
Speed	3200 RPM (Ref.)
Air Flow	57.92 CFM (1.640 m ³ /min)
Acoustical Noise	38.0 (≤41.0) dB–A
Dimensions	92*92*25.4mm
Operation temperature	–10°C ~70°C
Miniature Circuit Breaker	
Number of Poles	2P
Rated Current	25A
Rated Voltage	415V
Thermal Magnetic Release	C
Mechanical Life	20000 cycles
Electrical Life	6000 cycles
Short–circuit Breaking Capacity(Icn)	6000A
Dimensions(W*H*D)	35.6*84.2*74mm
Installation	DIN–rail mounted
Microswitch	
Brand	Omron
Model	V156–1C25
PIN	NC, NO, COM; NC and COM have connected cables.
Rated Current	15A
Rated Voltage	250V
Mechanical Life	15,000,000 cycles

Products









Heater (Optional)

Brand	CHINT
Model	NTR1-045
Heater Capacity (Typical)	45W
Input Voltage	220V AC (120V~240V AC) *The heating performance will be reduced by 10% when operating voltage is lower than 140V.
Input Current	3A max.
Heating Element	PTC resistor
Material	Aluminum
Connector	3*press clamps, fit 0.5~1.5mm ² standard wire and 0.5~2.5mm ² rigid wire
Dimensions	70*110*57mm
Weight	0.22kg
Installation	DIN-rail mounted
Operation temperature	-45°C ~70°C

Thermostat (Optional)


Brand	CHINT
Model	Red Thermostat: NTK1-211G Blue Thermostat: NTK1-111G
Function	NTK1-211G Red Thermostat: normally close, disconnect the circuit when the set temperature is reached, usually used for heating. NTK1-111G Blue Thermostat: normally open, connect the circuit when the set temperature is reached, usually used for fans.
Setting Temperature Range	0~60°C
Switch Temperature Difference	7K
Service Life	100000 cycles
Max capacity	250V AC@10A
Connection	2-pole, 2.5mm ² (12AWG) max. wire
Dimensions (W*H*D)	33*60*39mm
Weight	40g
Installation	DIN-rail mounted
Operation Temperature	-20°C ~80°C

Appearances and Dimensions

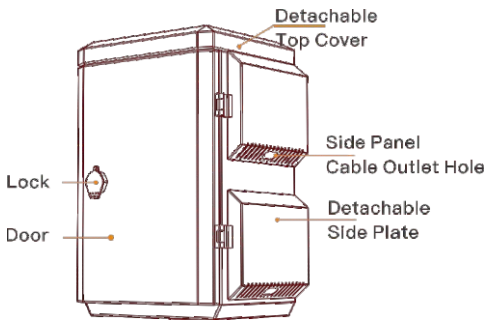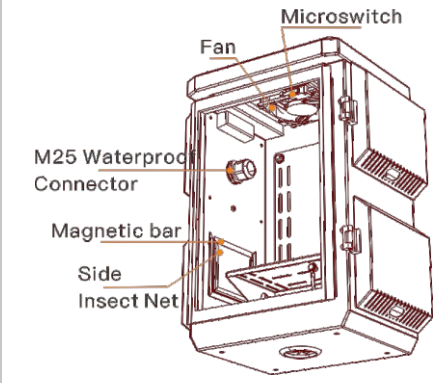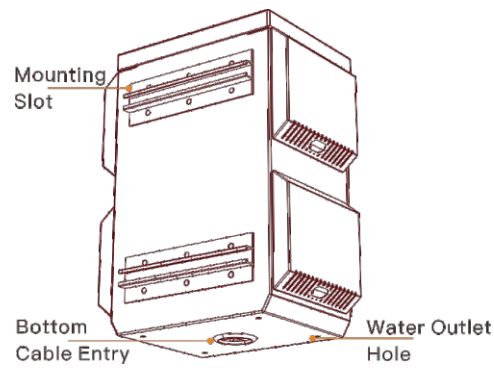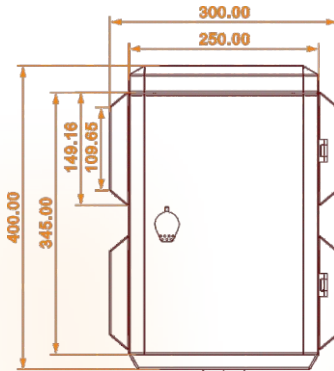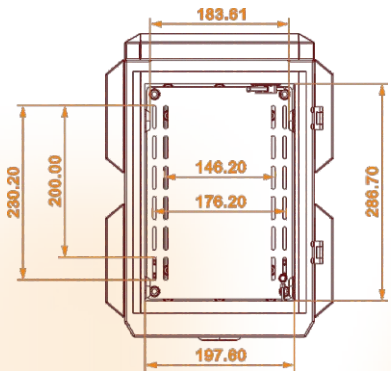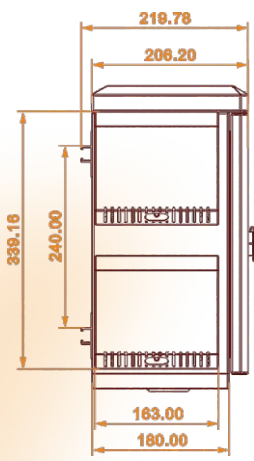
WI-IOTBOX01		
Front Overview	Inner Overview	Rear Overview
		
Front	Inner Front	Left Side
		
Inner Left	Bottom	Inner Top
		

WI-IOTBOX02


Front Overview Inner Overview Rear Overview

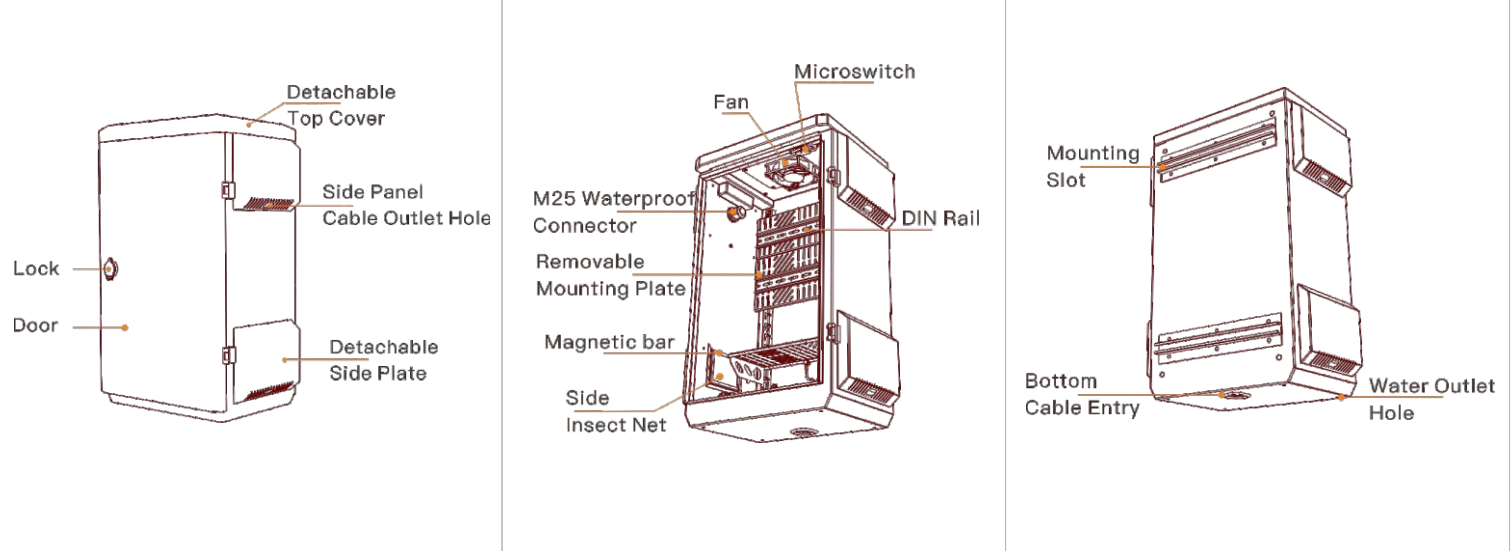

Front Inner Front Left Side



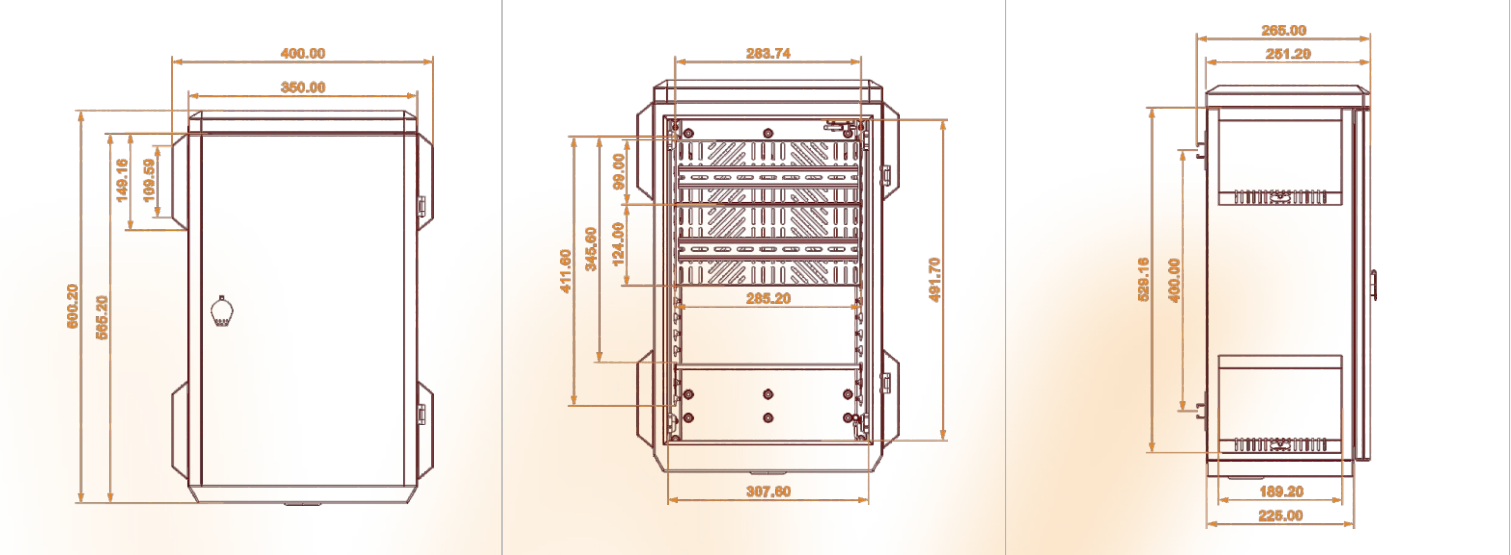


Inner Left Bottom Inner Top



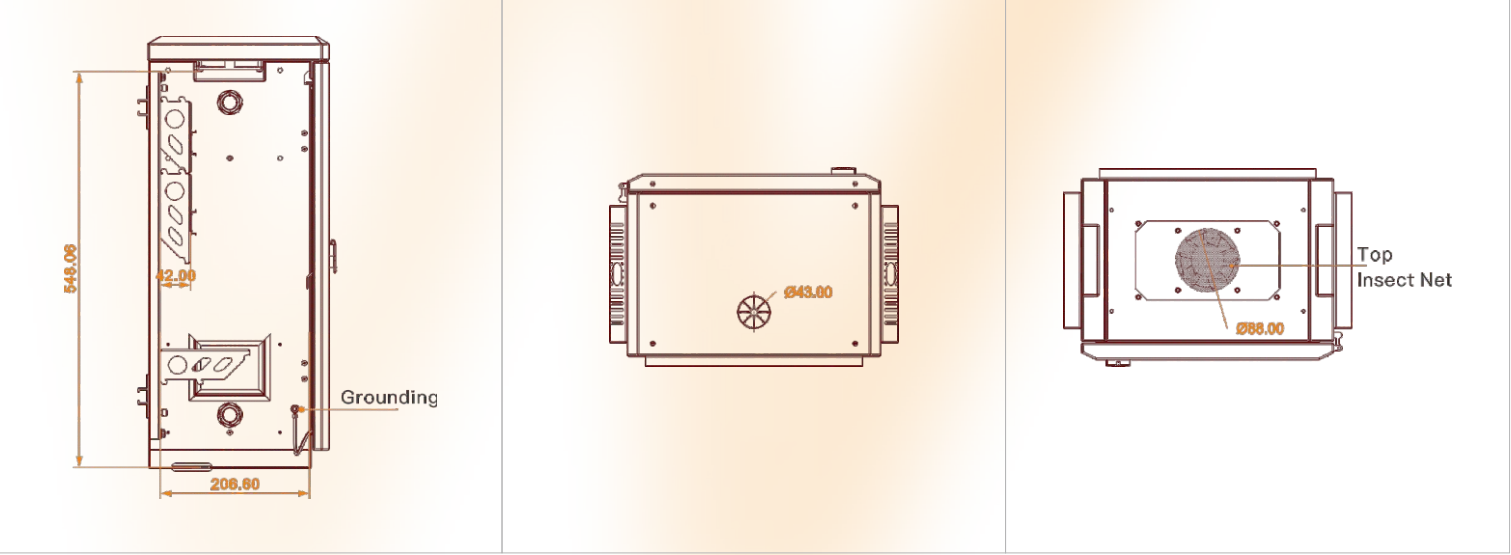


WI-IOTBOX03




Front Overview Inner Overview Rear Overview

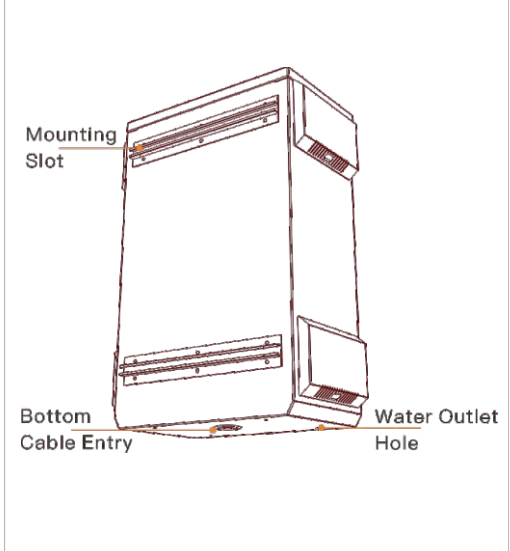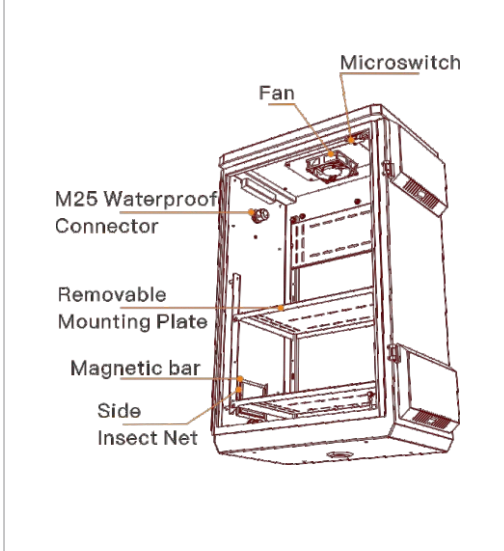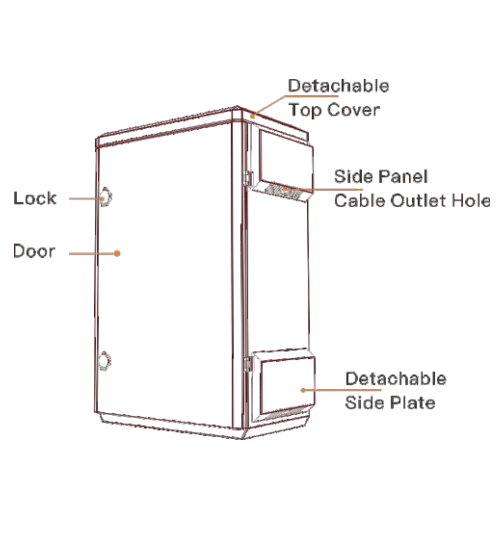

Front Inner Front Left Side

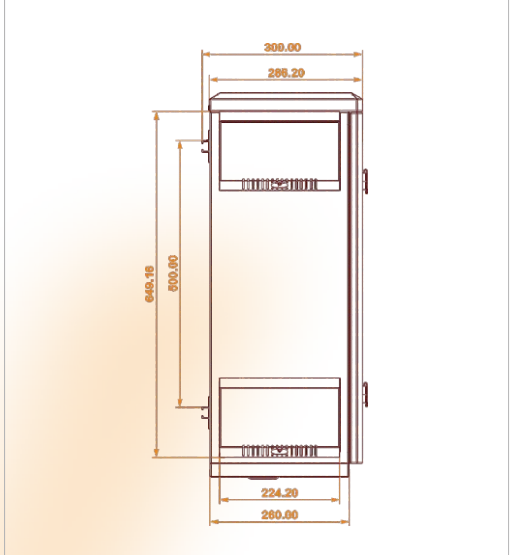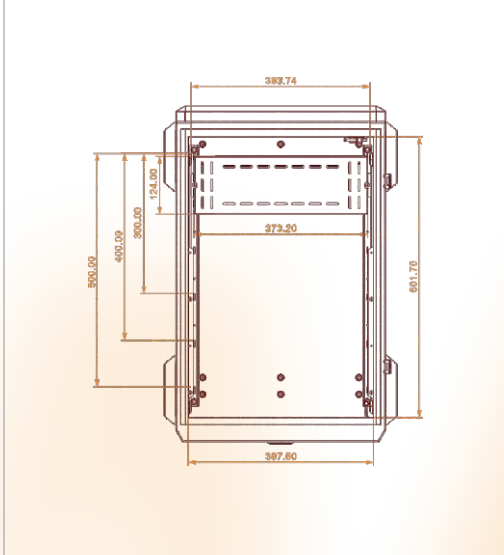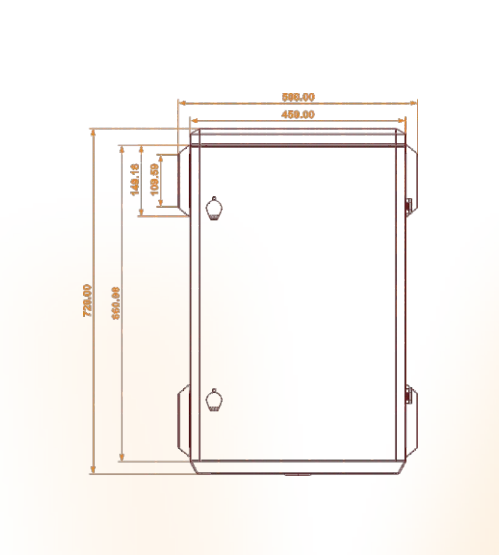


Inner Left Bottom Inner Top

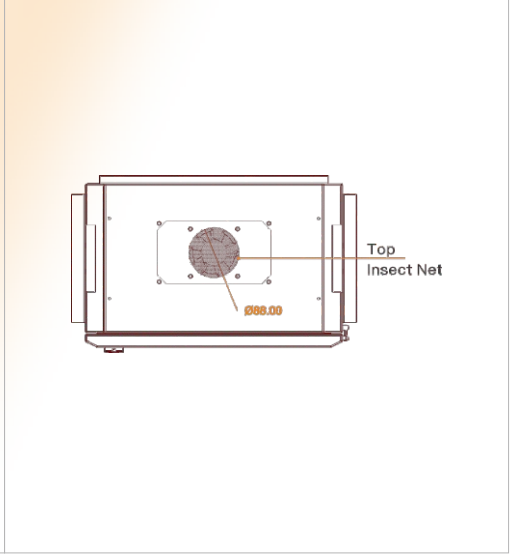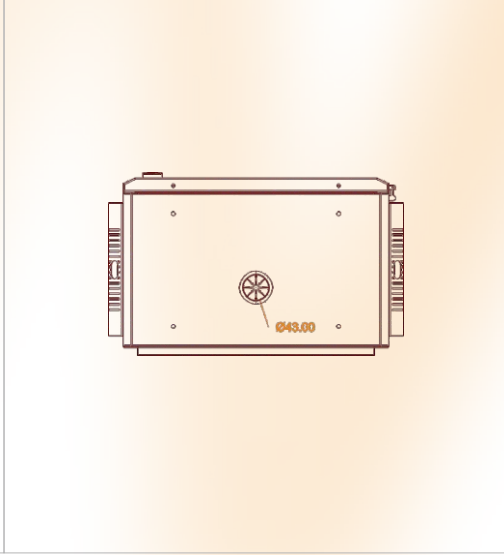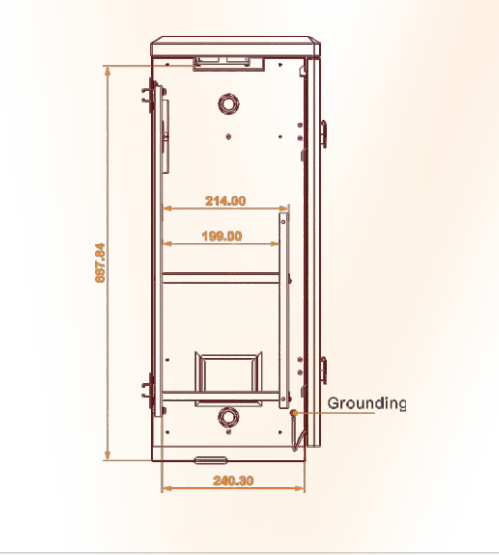

Package Content


Welcome to order our products. After purchasing, you will receive:

WI-IOTBOX01



1*BOX (With 1*Fan, 1*Micro Switch, 4*M25 waterproof connector)

Wall Mounting Accessories



2*Hanging Pieces (Small), 2*Hanging Pieces (Large),
4*Expansion screws, 4*Hex screws

Pole Mounting Accessories




2*1.1m Stainless Steel Cable Ties (50–300mm in diameter),
2*Stainless Steel Universal Clips



1*Quick Installation Guide




1*Miniature Circuit Breaker

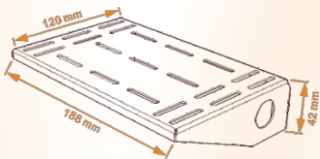

***Optional:** 1*188*42*120mm
Mounting Plate and Mounting Accessories



2*Key




2*DIN Rail (Length: 180mm)




1*Grounding Connector

WI-IOTBOX02



1*BOX (With 1*Fan, 1*Micro Switch, 4*M25 waterproof connector)

Wall Mounting Accessories

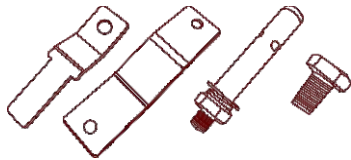

2*Hanging Pieces (Small), 2*Hanging Pieces (Large),
4*Expansion screws, 4*Hex screws

Pole Mounting Accessories




2*1.1m Stainless Steel Cable Ties (50–300mm in diameter),
2*Stainless Steel Universal Clips



1*Quick Installation Guide




1*Miniature Circuit Breaker



1*285.2*42*99mm Mounting Plate
2*285.2*42*124mm Mounting Plate



2*Key




2*DIN Rail (Length: 275mm)




1*Grounding Connector

WI-IOTBOX03




1*BOX (With 1*Fan, 1*Micro Switch, 4*M25 waterproof connector)

Wall Mounting Accessories

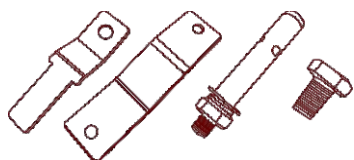

2*Hanging Pieces (Small), 2*Hanging Pieces (Large),
4*Expansion screws, 4*Hex screws

Pole Mounting Accessories

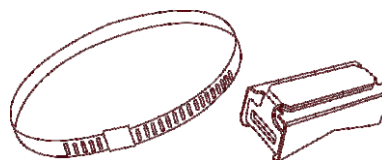


2*1.1m Stainless Steel Cable Ties (50–300mm in diameter),
2*Stainless Steel Universal Clips



1*Quick Installation Guide




1*Miniature Circuit Breaker

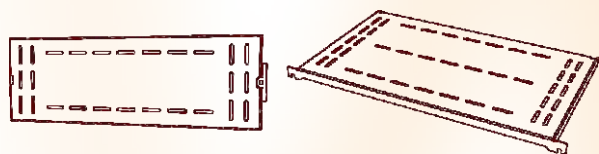

1*373.2*142mm Vertical DIN Rail Mounting Plate
2*373.2*214mm Horizontal Mounting Plate



2*Key




2*DIN Rail (Length: 345mm)



1*Grounding Connector

Miniature Circuit Breaker Wiring Diagram

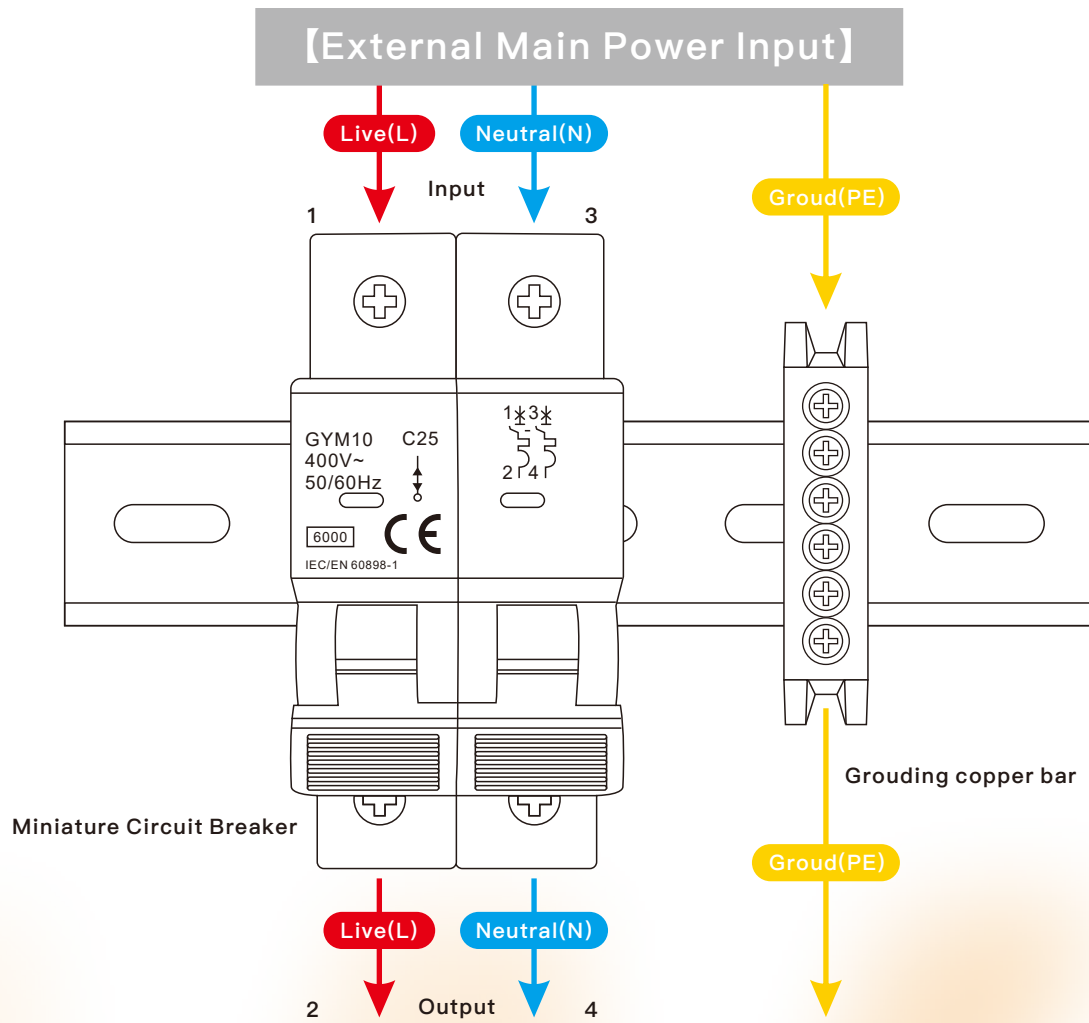

Optional Accessory

Item	
 Thermostat Red Thermostat: NTK1-211G Blue Thermostat: NTK1-111G	 Heater NTR1-045



Wireless-Tek Technology Limited


Address: Building 3, Units 1801-1807, 1812, Huaqiang Era Plaza, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen City, Guangdong Province, China.

Website: www.wireless-tek.com

Tel: 86-0755-32811290

Email: sales@wireless-tek.com

Technical Support: tech@wireless-tek.com



Technical Support



Cloud Management



Company Website