


## Installation Guide


WI-PS305G | WI-PS305GF | WI-PS308G | WI-PS309GF | WI-PS310GF  
WI-PS318GF | WI-PS320GF | WI-PS326GF | WI-PS328GF | WI-PS348G  
WI-PS105F | WI-PS110F | WI-PS128GF | WI-PS150GF

### 1. Package Contents


- 1.1 Take WI-PS326GF as an example




1 × WI-PS326GF



1 × Power Cord



1 × Wall mount kit  
(Only for WI-PS305G, WI-PS308G, WI-PS305GF, WI-PS309GF)





1 × Rack mount kit  
(Except WI-PS305G, WI-PS308G, WI-PS305GF, WI-PS309GF)



1 × Installation guide

### 2. Hardware Introduction


- 2.1 Front Panel

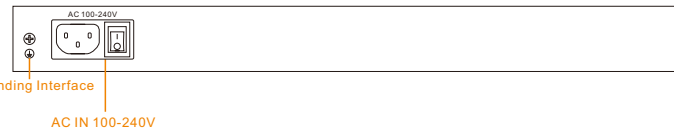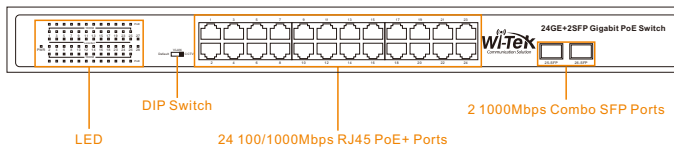

| WI-PS326GF             |                                                                                                                                                                              |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DIP Switch Description |                                                                                                                                                                              |
| Default                | The transmission distance of PoE port can be up to 100m with 100Mbps.                                                                                                        |
| VLAN                   | All downlink ports are isolated from each other, but can communicate with uplink ports.                                                                                      |
| CCTV                   | CCTV mode is to ensure voice and video applications remain clear and lag-free.                                                                                               |
| Extend                 | The transmission distance of PoE port can be up to 250m, but the rate is limited to 10Mbps                                                                                   |
| LED Light              |                                                                                                                                                                              |
| PWR (Power indicator)  | Off: the device is power off or failed<br>On: the device power on is normal                                                                                                  |
| Link/Act indicator     | Off: ports link down<br>On: ports link up<br>Blinking: data on TX/RX                                                                                                         |
| 1000Mbps indicator     | Off: The negotiate speed is 10/100Mbps, not 1000Mbps<br>On: The negotiate speed is 1000Mbps and ports link up<br>Blinking: The negotiate speed is 1000Mbps and data on TX/RX |

| Model      | Interface                                                                                   | Power Budget | Power Supply | Default Mode | Extend Mode | VLAN Mode | CCTV Mode |
|------------|---------------------------------------------------------------------------------------------|--------------|--------------|--------------|-------------|-----------|-----------|
| WI-PS305G  | Port 1: 100Mbps RJ45 PoE+ 60W<br>Port 2-4: 100Mbps RJ45 PoE+ Ports<br>2 1000Mbps RJ45 Ports | 65W          | AC 100~240V  | √            | Port 1-2    | √         | ×         |
| WI-PS308G  | Port 1: 100Mbps RJ45 PoE+ 60W<br>Port 2-8: 100Mbps RJ45 PoE+ Ports<br>2 1000Mbps RJ45 Ports | 120W         | AC 100~240V  | √            | Port 1-2    | √         | ×         |
| WI-PS305GF | 4 1000Mbps RJ45 PoE+ Ports<br>1 1000Mbps RJ45 Port<br>1 1000Mbps SFP Slot                   | 65W          | AC 100~240V  | √            | Port 1-4    | √         | ×         |
| WI-PS309GF | 8 1000Mbps RJ45 PoE+ Ports<br>1 1000Mbps RJ45 Port<br>1 1000Mbps SFP Slot                   | 150W         | AC 100~240V  | √            | Port 1-8    | √         | ×         |
| WI-PS310GF | 8 1000Mbps RJ45 PoE+ Ports<br>2 1000Mbps SFP Slots                                          | 150W         | AC 100~240V  | √            | √           | √         | ×         |
| WI-PS318GF | 16 1000Mbps RJ45 PoE+ Ports<br>2 1000Mbps SFP Slots                                         | 350W         | AC 100~240V  | √            | ×           | √         | √         |
| WI-PS320GF | 16 1000Mbps RJ45 PoE+ Ports<br>2 1000Mbps SFP Slots                                         | 350W         | AC 100~240V  | √            | ×           | √         | √         |
| WI-PS326GF | 24 1000Mbps RJ45 PoE+ Ports<br>2 1000Mbps SFP Slots                                         | 400W         | AC 100~240V  | √            | ×           | √         | √         |
| WI-PS328GF | 24 1000Mbps RJ45 PoE+ Ports<br>4 1000Mbps Combo SFP Ports                                   | 400W         | AC 100~240V  | ×            | ×           | ×         | ×         |
| WI-PS348G  | 48 1000Mbps RJ45 PoE+ Ports                                                                 | 600W         | AC 100~240V  | ×            | ×           | ×         | ×         |
| WI-PS105F  | 4 100Mbps RJ45 PoE+ Ports<br>1 1000Mbps SC Fiber                                            | 65W          | AC 100~240V  | ×            | ×           | ×         | ×         |
| WI-PS110F  | 8 100Mbps RJ45 PoE+ Ports<br>1 1000Mbps Combo Port                                          | 150W         | AC 100~240V  | √            | √           | √         | ×         |
| WI-PS128GF | 24 1000Mbps RJ45 PoE+ Ports<br>4 1000Mbps Combo Ports                                       | 350W         | AC 100~240V  | ×            | ×           | ×         | ×         |
| WI-PS150GF | 48 1000Mbps RJ45 PoE+ Ports<br>2 1000Mbps Combo Ports                                       | 700W         | AC 100~240V  | ×            | ×           | ×         | ×         |

### 3. Hardware Installation


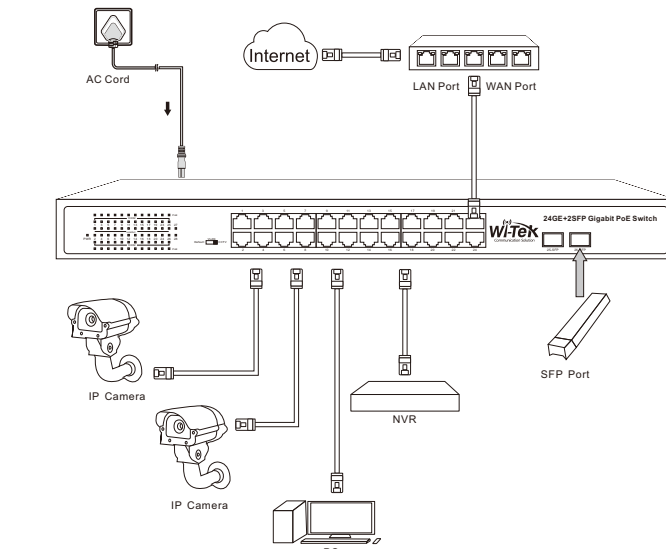


### 4. Installation

- Wall mounted  
(Only for WI-PS305G, WI-PS308G, WI-PS305GF, WI-PS309GF)



- Rack mounted  
(Except WI-PS305G, WI-PS308G, WI-PS305GF, WI-PS309GF)

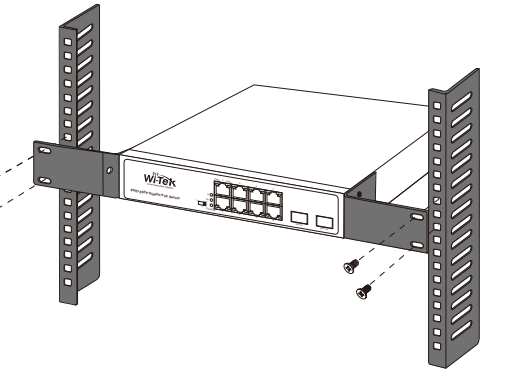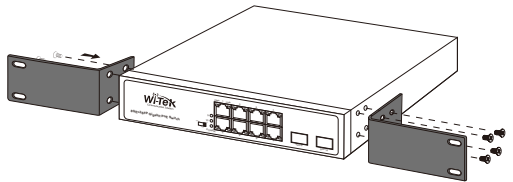

### Warranty Card

|                   |  |
|-------------------|--|
| Username          |  |
| Address           |  |
| Telephone No.     |  |
| Purchase Shop     |  |
| Purchase Address  |  |
| Product Model No. |  |
| Purchase Time     |  |
| Serial No.        |  |
| Dealer Signature  |  |

- If the product defects within three months after purchase, we will provide you a new product of the same model.
- If the product defects within the three-year warranty period, we will provide the professional maintenance service.
- Proof of purchase and a complete product serial number are required to receive any services guaranteed as part of the limited warranty.
- Any other defects that are not caused by workmanship or product quality, such as natural disaster, water damage, extreme thermal or environmental conditions, sticker damaged, warranty card losing will disqualify the product from limited warranty.



Wireless-Tek Technology Limited  
Address: Biaofang Technology Building 402, Bao'an street,  
Baoan District, Shenzhen City, Guangdong, China  
Website: www.wireless-tek.com  
Tel: 86-0755-32811290  
Email: sales@wireless-tek.com  
Technical Support: tech@wireless-tek.com