



Quick Installation Guide


Cloud-Managed Wireless Ceiling Access Point




WI-AP219AX-Lite

www.wireless-tek.com

1. Packing Content



1 x AP




4 x Plastic Anchor

4 x Self-Tapping Screws




1 x Ethernet Cable



1 x Quick Installation Guide

2. Appearance Overview

• WI-AP219AX-Lite

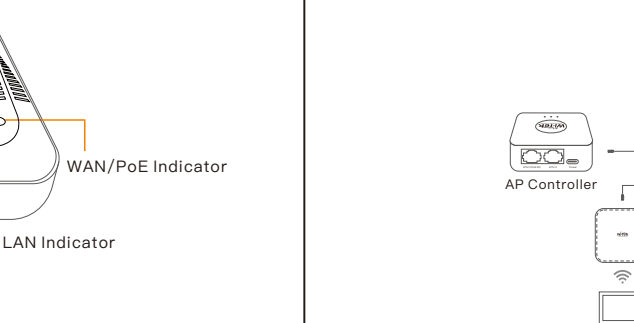

• LED indicator


LED Indicators	Status	Description
System Indicator	Red light	The system is starting.
	Blue light	The system is working normally.

• Port and Button


Port&Button	Description
RESET	Reset button, which is used to restore the factory. Holding down the reset button for 10 seconds to revert to factory settings.
ETH1/PoE	10/100/1000Mbps Base-T Ethernet Port, which supports 802.3ETH1/PoE PoE Input. If the AP is powered through PoE, please connect this port to the PoE switch supporting 802.3at output. It is generally connected to the upstream switch.

3. Typical Connection

• Bypass mode topology

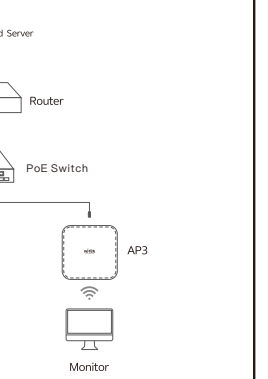


• AC Gateway mode topology

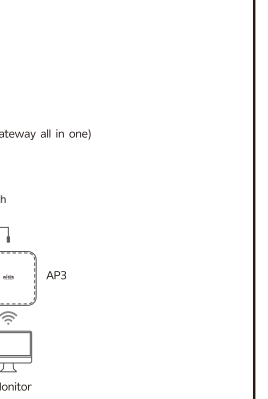


4. Device Installation

• Ceiling Mounting

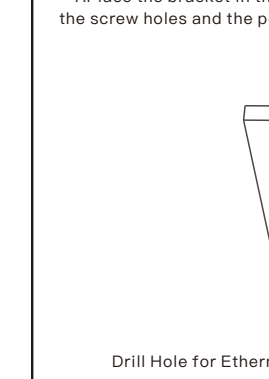


• Power via Power adapter

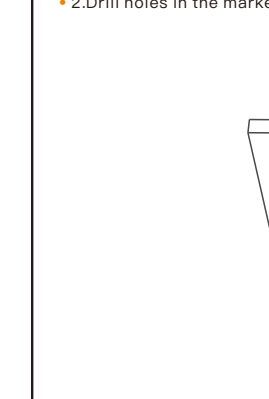


5. Power Supply

• Power via PSE Device

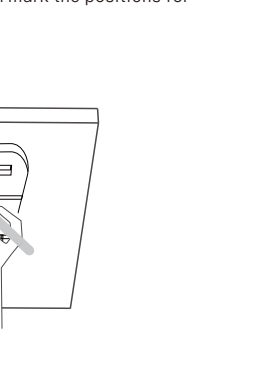


• Power via Power adapter

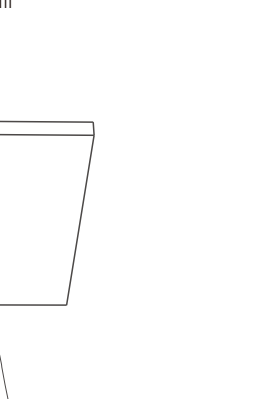


6. Configuration Method

Method 1. Connect computer to the wireless signal of AP, the default SSID is "WI-TEK xxxx". Password is 88888888

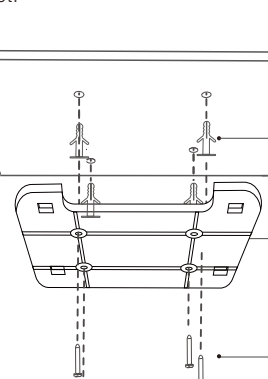


Method 2. Connect computer to the AP by Ethernet cable.

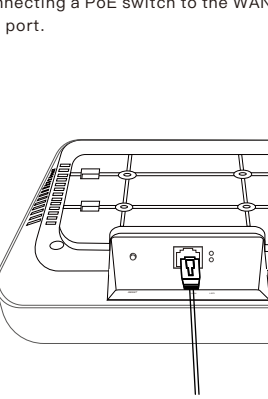


7. Cloud management settings

Step 1. On the computer, please set the static IP under the same subnet with AP, 192.168.1.xx

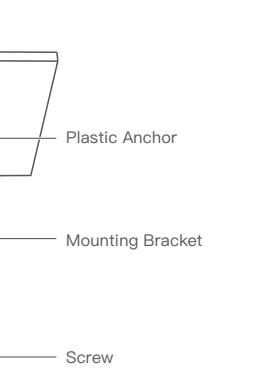

Step 2. Please launch a browser such as Google Chrome or Firefox, type 192.168.1.88 into address bar and click on enter to get in the login page of wireless access point. The default login password is "admin".

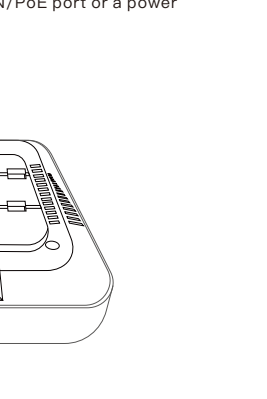

8. FAQ

Q1. The LED is not lit.

- A1: Please check the PoE switch is 802.3af/at.
- A2: Make sure the PoE switch is outputting the correct voltage.
- A3: Make sure the Ethernet cable does support PoE function.

Q2. What can I do if the login window does not appear?

- A1: Please check if the computer is the static IP 192.168.1.xxx.
- A2: Please try another browser.
- A3: Reboot your AP device and try again.
- A4: Disconnect the Internet connection and try again, after login, connect to the internet.

9. Warranty Card


Username	Address
Telephone No.	Purchase Shop
Purchase Address	Product Model No.
Purchase Time	Serial No.
Dealer Signature	

Technical Support


Wireless-Tek Technology Limited
 Address: Biao'an Technology Building 402, Bao'an street,
 Bao'an District, Shenzhen City, Guangdong, China
 Website: www.wireless-tek.com
 Tel: 86-0755-32811290
 Email: sales@wireless-tek.com
 Technical Support: tech@wireless-tek.com

10. Add EWEB

(1) Click ADD NETWORK

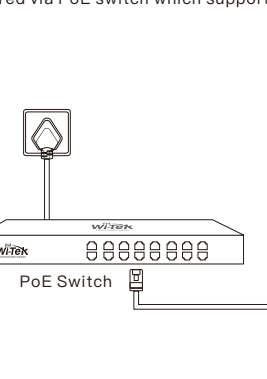


(2) Fill in the group name and location, click save.

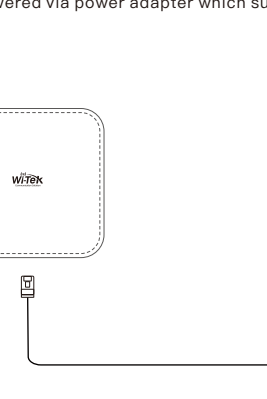


11. Add EWEB

(3) And click next.

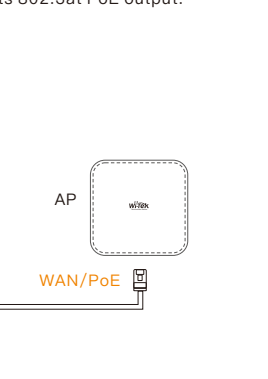


(4) Enter serial number, click ADD to create and click FINISH, the configuration is complete.

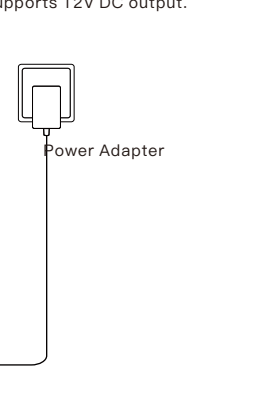


12. Add EWEB

(5) In the relevant device options, you can see the bound device information.

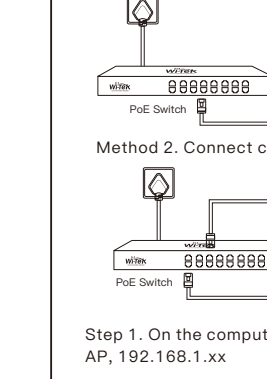


(6) Click Tunnel, Select binding device type, click EWEB to log in to the device.

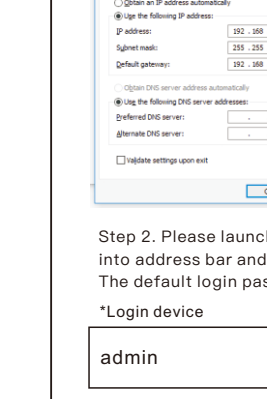


13. Add EWEB

(7) Click Tunnel, Select binding device type, click EWEB to log in to the device.

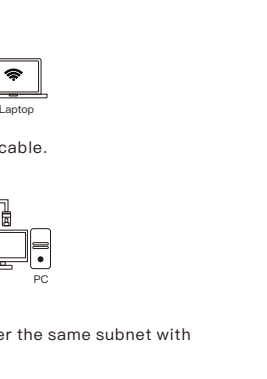


(8) Click Tunnel, Select binding device type, click EWEB to log in to the device.

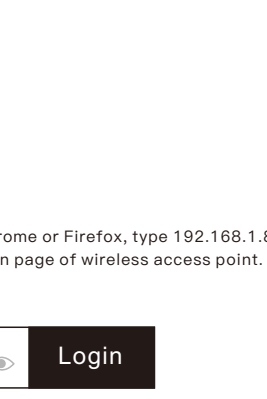


14. Add EWEB

(9) Click Tunnel, Select binding device type, click EWEB to log in to the device.

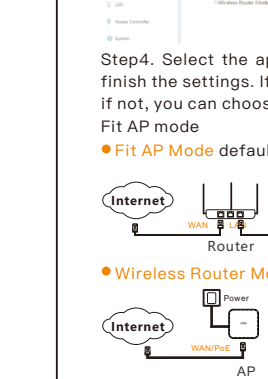


(10) Click Tunnel, Select binding device type, click EWEB to log in to the device.

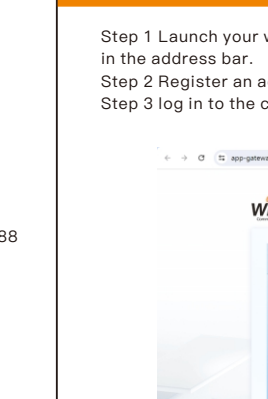


15. Add EWEB

(11) Click Tunnel, Select binding device type, click EWEB to log in to the device.

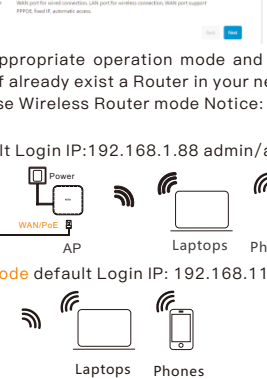


(12) Click Tunnel, Select binding device type, click EWEB to log in to the device.

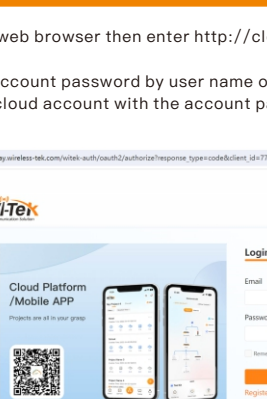


16. Add EWEB

(13) Click Tunnel, Select binding device type, click EWEB to log in to the device.

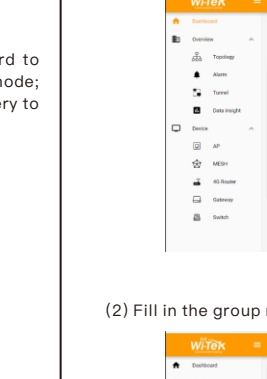


(14) Click Tunnel, Select binding device type, click EWEB to log in to the device.

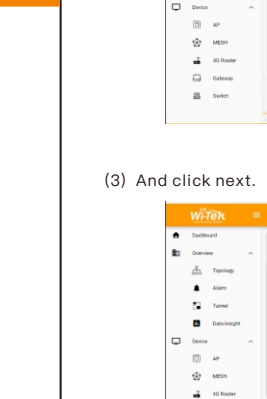


17. Add EWEB

(15) Click Tunnel, Select binding device type, click EWEB to log in to the device.

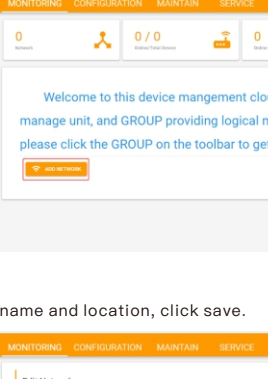


(16) Click Tunnel, Select binding device type, click EWEB to log in to the device.

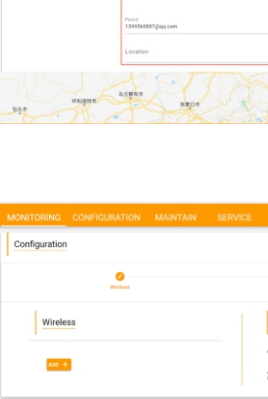


18. Add EWEB

(17) Click Tunnel, Select binding device type, click EWEB to log in to the device.

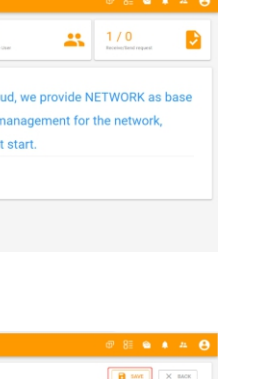


(18) Click Tunnel, Select binding device type, click EWEB to log in to the device.

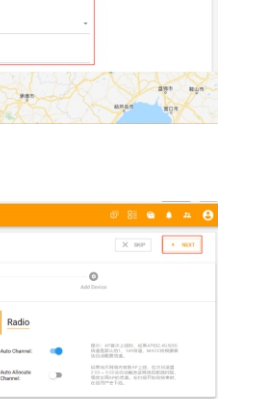


19. Add EWEB

(19) Click Tunnel, Select binding device type, click EWEB to log in to the device.

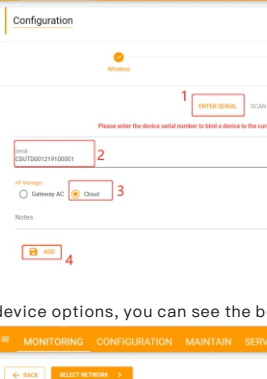


(20) Click Tunnel, Select binding device type, click EWEB to log in to the device.

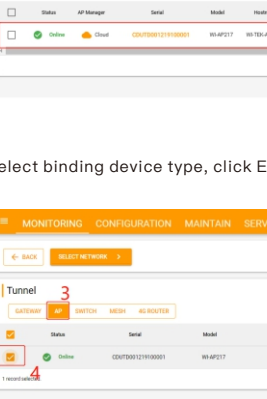


20. Add EWEB

(21) Click Tunnel, Select binding device type, click EWEB to log in to the device.

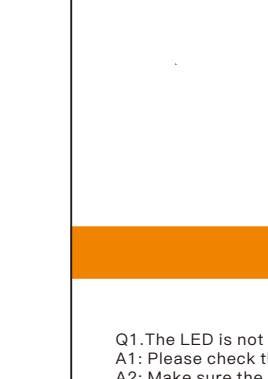

(22) Click Tunnel, Select binding device type, click EWEB to log in to the device.

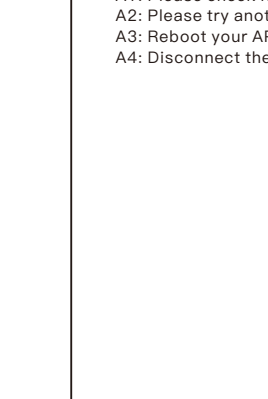


21. Add EWEB

(23) Click Tunnel, Select binding device type, click EWEB to log in to the device.




(24) Click Tunnel, Select binding device type, click EWEB to log in to the device.

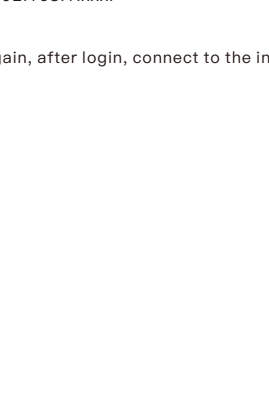


22. Add EWEB

(25) Click Tunnel, Select binding device type, click EWEB to log in to the device.

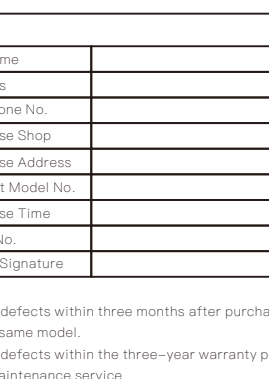

(26) Click Tunnel, Select binding device type, click EWEB to log in to the device.

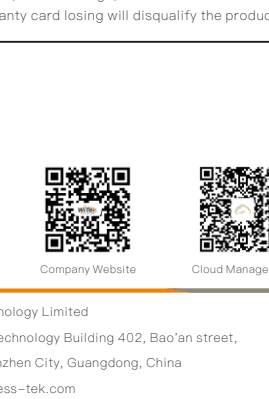

23. Add EWEB

(27) Click Tunnel, Select binding device type, click EWEB to log in to the device.



(28) Click Tunnel, Select binding device type, click EWEB to log in to the device.



24. Add EWEB

(29) Click Tunnel, Select binding device type, click EWEB to log in to the device.



(30) Click Tunnel, Select binding device type, click EWEB to log in to the device.



25. Add EWEB

(31) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(32) Click Tunnel, Select binding device type, click EWEB to log in to the device.

26. Add EWEB

(33) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(34) Click Tunnel, Select binding device type, click EWEB to log in to the device.

27. Add EWEB

(35) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(36) Click Tunnel, Select binding device type, click EWEB to log in to the device.

28. Add EWEB

(37) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(38) Click Tunnel, Select binding device type, click EWEB to log in to the device.

29. Add EWEB

(39) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(40) Click Tunnel, Select binding device type, click EWEB to log in to the device.

30. Add EWEB

(41) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(42) Click Tunnel, Select binding device type, click EWEB to log in to the device.

31. Add EWEB

(43) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(44) Click Tunnel, Select binding device type, click EWEB to log in to the device.

32. Add EWEB

(45) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(46) Click Tunnel, Select binding device type, click EWEB to log in to the device.

33. Add EWEB

(47) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(48) Click Tunnel, Select binding device type, click EWEB to log in to the device.

34. Add EWEB

(49) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(50) Click Tunnel, Select binding device type, click EWEB to log in to the device.

35. Add EWEB

(51) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(52) Click Tunnel, Select binding device type, click EWEB to log in to the device.

36. Add EWEB

(53) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(54) Click Tunnel, Select binding device type, click EWEB to log in to the device.

37. Add EWEB

(55) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(56) Click Tunnel, Select binding device type, click EWEB to log in to the device.

38. Add EWEB

(57) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(58) Click Tunnel, Select binding device type, click EWEB to log in to the device.

39. Add EWEB

(59) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(60) Click Tunnel, Select binding device type, click EWEB to log in to the device.

40. Add EWEB

(61) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(62) Click Tunnel, Select binding device type, click EWEB to log in to the device.

41. Add EWEB

(63) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(64) Click Tunnel, Select binding device type, click EWEB to log in to the device.

42. Add EWEB

(65) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(66) Click Tunnel, Select binding device type, click EWEB to log in to the device.

43. Add EWEB

(67) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(68) Click Tunnel, Select binding device type, click EWEB to log in to the device.

44. Add EWEB

(69) Click Tunnel, Select binding device type, click EWEB to log in to the device.

(70) Click Tunnel, Select binding device type, click EWEB to log in to the device.

45. Add EWEB

(71) Click Tunnel, Select binding device type, click EWEB to log in to the device.

