


Quick Installation Guide


250 meters Long-Range PoE Switch for CCTV

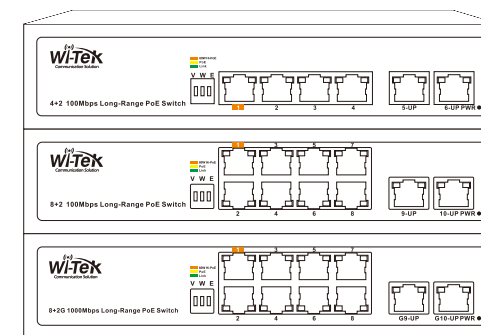


WI-PS205(V3) | WI-PS210(V3) | WI-PS210G(V3)

1. Package Contents

- Take WI-PS205 as an example



1 x Switch



1 x Power Cord




1 x Installation Guide

2. Appearance Overview

- For WI-PS205

- Front panel



- DIP Switch
- 1 10/100Mbps Hi-PoE 60W Port
 - 3 10/100Mbps PoE+ Ports
 - 2 10/100Mbps Uplink Ports

- Back panel




- AC 100~240V Input Power Port
- Grounding

WI-PS205 DIP Switch Description	
V(VLAN)	All downlink ports are isolated from each other, but can communicate with uplink ports.
W(PoE Watchdog)	All PoE ports enable PoE watchdog function, which can detect and reboot the offline compliant PoE powered devices.
E(Extend)	The transmission distance of port can be up to 250m, but the rate is limited to 10Mbps.
LED Indicators	Description
PWR	Solid on: The device power on is normal Off: The device is power off or failed
PoE	Solid on: PoE is working Off: PoE not working
Link	Blinking: The data on TX/RX Solid on: The port link down


- For WI-PS210

- Front panel



- DIP Switch
- 1 10/100Mbps Hi-PoE 60W Port
 - 7 10/100Mbps PoE+ Ports
 - 2 10/100Mbps Uplink Ports

- Back panel




- AC 100~240V Input Power Port
- Grounding

WI-PS210 DIP Switch Description	
V(VLAN)	All downlink ports are isolated from each other, but can communicate with uplink ports.
W(PoE Watchdog)	All PoE ports enable PoE watchdog function, which can detect and reboot the offline compliant PoE powered devices.
E(Extend)	The transmission distance of port can be up to 250m, but the rate is limited to 10Mbps.
LED Indicators	Description
PWR	Solid on: The device power on is normal Off: The device is power off or failed
PoE	Solid on: PoE is working Off: PoE not working
Link	Blinking: The data on TX/RX Solid on: The port link down


- For WI-PS210G

- Front panel



- DIP Switch
- 1 10/100Mbps Hi-PoE 60W Port
 - 7 10/100Mbps PoE+ Ports
 - 2 100/1000Mbps Uplink Ports

- Back panel




- AC 100~240V Input Power Port
- Grounding

WI-PS210G DIP Switch Description	
V(VLAN)	All downlink ports are isolated from each other, but can communicate with uplink ports.
W(PoE Watchdog)	All PoE ports enable PoE watchdog function, which can detect and reboot the offline compliant PoE powered devices.
E(Extend)	The transmission distance of port can be up to 250m, but the rate is limited to 10Mbps.
LED Indicators	Description
PWR	Solid on: The device power on is normal Off: The device is power off or failed
PoE	Solid on: PoE is working Off: PoE not working
Link	Blinking: The data on TX/RX Solid on: The port link down


3. Installation

- 3.1 Desktop Installation

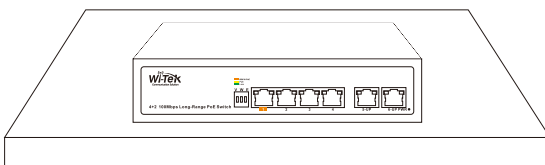

- 3.2 Wall-mount Installation

Install the Switch by following the steps: Fix 2 screws on the wall to align the 2 fixing holes on the Switch, as shown in the figure below, and hang the Switch smoothly on the screws.

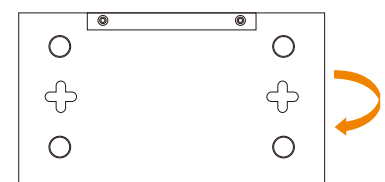

Warranty Card

Username	
Address	
Telephone No.	
Purchase Shop	
Purchase Address	
Product Model No.	
Purchase Time	
Serial No.	
Dealer Signature	

- If the product defects within three months after purchase, we will provide you a new product of the same model.
- If the product defects within the three-year warranty period, we will provide the professional maintenance service.
- Proof of purchase and a complete product serial number are required to receive any services guaranteed as part of the limited warranty.
- Any other defects that are not caused by workmanship or product quality, such as natural disasters, water damage, extreme thermal or environmental conditions, sticker damaged, warranty card losing will disqualify the product from limited warranty.



Wireless-Tek Technology Limited
 Address: Biaofan Technology Building 402, Bao'an street,
 Baoan District, Shenzhen City, Guangdong, China
 Website: www.wireless-tek.com
 Tel: 86-0755-32811290
 Email: sales@wireless-tek.com
 Technical Support: tech@wireless-tek.com

